




VALVOLE BITUBO ART.1430

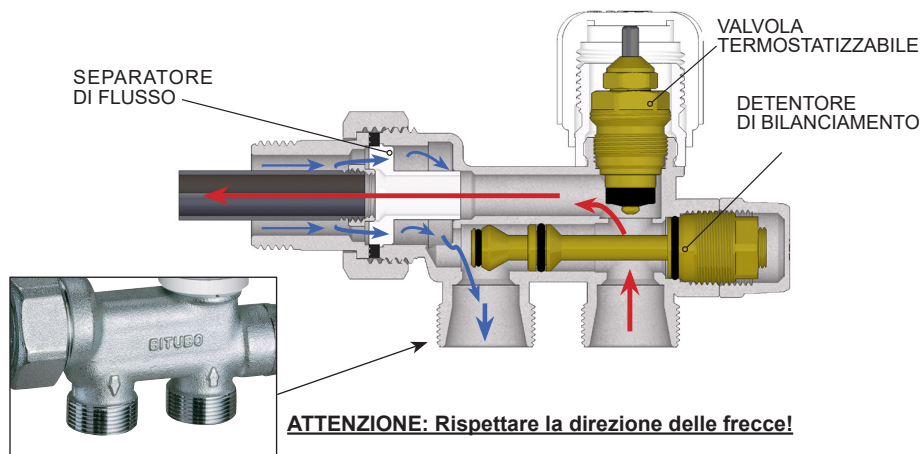

REGOLAZIONE DETENTORE

Per bilanciare l'impianto, svitare il cappuccio laterale ed utilizzando una chiave a brugola da 5mm, regolare la posizione del detentore.




COMANDI TERMOSTATICI

ART.1821 - Comando termostatico bianco opaco
ART.1822 - Comando termostatico nero opaco
ART.1823 - Comando termostatico nero lucido
ART.1824 - Comando termostatico bianco lucido
ART.1827 - Comando termostatico cromato lucido
ART.1828 - Comando termostatico bianco lucido



INSTALLAZIONE

Svitare il volantino manuale e rimuovere il supporto filettato con l'aiuto di un cacciavite oppure con l'apposito kit contenuto nella confezione del comando termostatico.



Seguire successivamente la procedura illustrata nel libretto dei comandi termostatici.

CARATTERISTICHE TECNICHE


Corpo valvola e raccordi: CW617N
Particolari minuteria: CW614N
O-Ring di tenuta: EPDM
Sonda metallica 12mm lunghezza 45 cm
Pressione nominale: 10 bar
Temperatura massima: 95°C



NB: In caso di smaltimento all'interno della comunità europea, il prodotto da luogo a rifiuti classificati con codice CER: 17 04 01, 17 02 03, 17 04 05 e 19 12 04.



DOUBLE-PIPE VALVE ART.1430

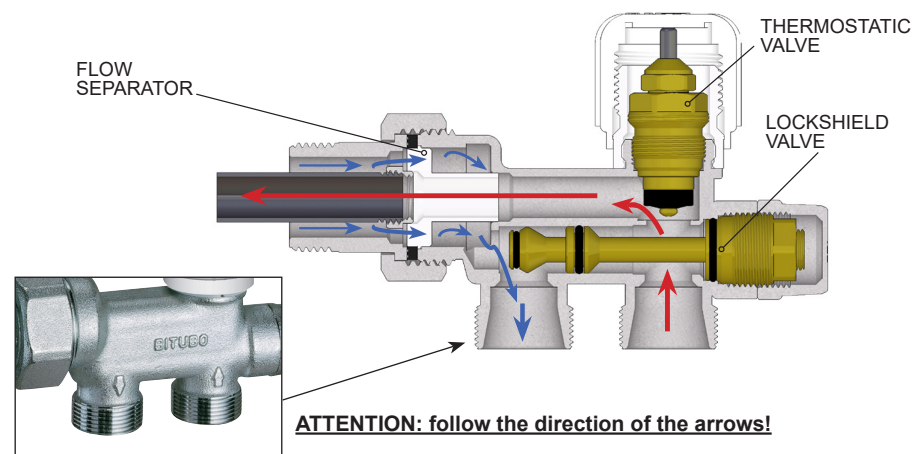

LOCKSHIELD VALVE SETTING

In order to set the plant, unscrew the lateral cap and adjust the lockshield valve position by means of a 5mm hex wrench.




THERMOSTATIC HEAD

ART.1821 - Thermostatic head matt white
ART.1822 - Thermostatic head matt black
ART.1823 - Thermostatic head glossy black
ART.1824 - Thermostatic head glossy white
ART.1827 - Thermostatic head chrome (glossy finish)
ART.1828 - Thermostatic head glossy white



INSTALLATION

Unscrew the manual regulating valve and remove the support from the valve body with the aid of a screwdriver or with the appropriate kit contained inside the thermostatic head package.



Then follow the procedure illustrated in the thermostatic control instructions.

TECHNICAL FEATURES

Valve and terminal body: CW617N
Small parts: CW614N
Sealing O-rings: EPDM
Metal probe d.12 mm length: 45 cm
Nominal pressure: 10 bar
Max. temperature: 95°C



In case of disposal within the European Community, the product gives rise to waste classified with the code CER: 17 04 01, 17 02 03, 17 04 05 and 19/12/04